

FLYSIMWARE

— FLY THE VINTAGE SKIES —



NIEUPORT 24

Version 1.0

COCKPIT

OVERVIEW

ALL PANELS

FRONT PANEL

Airspeed Indicator

Altimeter Indicator

Fuel Indicator

Blip Switch

RIGHT WALL

Clipboard

RPM Indicator

Fuel Pump

Starter Handcrank

Fuel Pressure

LEFT WALL

Throttle Lever

Mixture Lever

Compass

Oil Piston Valve

WINDSHIELD

Windshield

EXTERIOR

AIRCRAFT

Vickers Machine Gun

Cockpit Cover

Chokes

Service Doors

Engine Nacelle

Fuel Service

Tail Hook



RIGHT WALL



LEFT WALL



OIL PISTON VALVE

COMPASS

THROTTLE LEVER

MIXTURE LEVER

WINDSHIELD

Windshield Latch

Click to open

WINDSHIELD

Windshield

Click this region to close.

CLIPBOARD

CLIPBOARD

Click on the icons to show/hide the mentioned features.

Click to hide clipboard

Nieuport 24



Start procedure

1. Fill fuel tank.
2. Pump the fuel lever until 7psi or more.
3. Mixture set to cutoff.
4. Crank/spin prop 2 times.
5. Mixture set to full.
6. Crank/spin prop until engine starts.

VICKERS MACHINE GUN




COCKPIT COVER



CHOKES



SERVICE DOORS

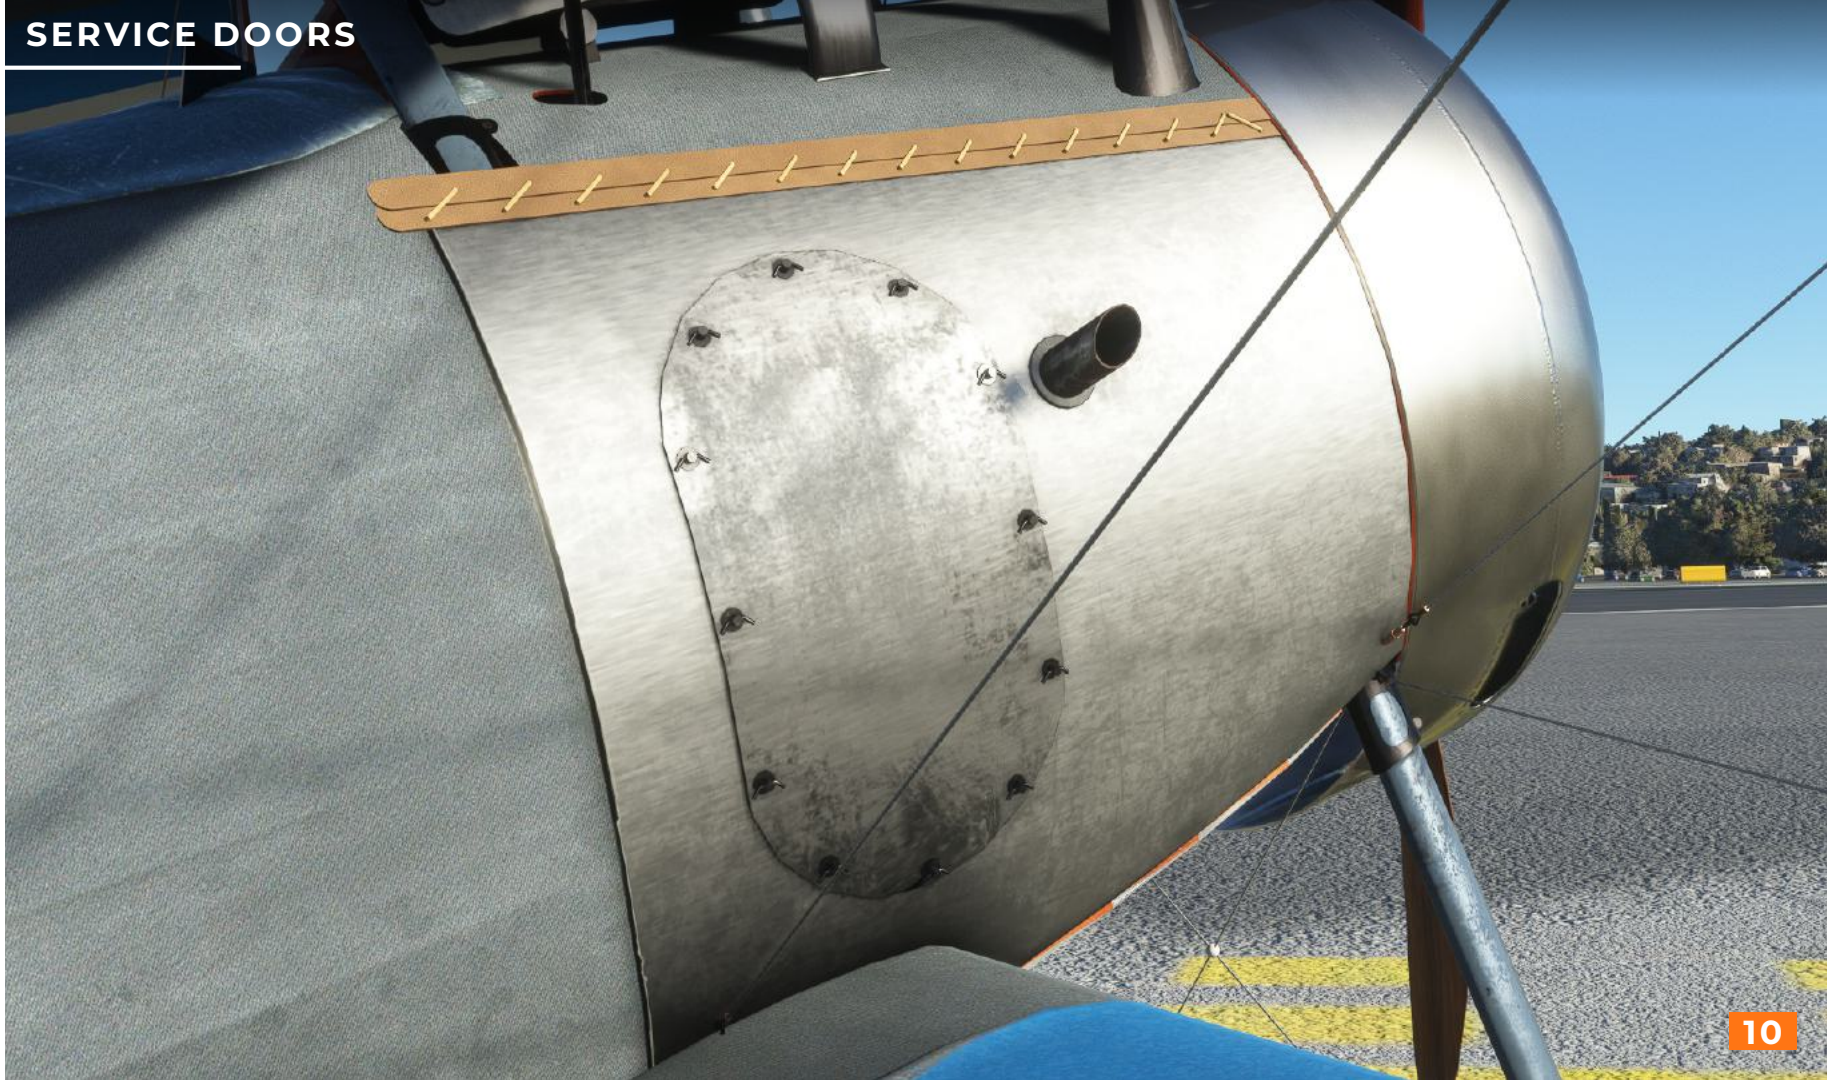

ENGINE NACELLE





TAIL HOOK

